

Economy and Ecology


**"50:1" 2 stroke mixed fuel,
friendly to the earth and your wallet!**

SEV-25L is designed only for "50:1" 2 stroke mixed fuel which is environmentally-friendly in terms of exhaust. Also, you can save a half of engine oil compared with the usual "25:1" 2 stroke mixed fuel.



- Koshin Original Engine.
- All aluminum die casting pump housing, impeller and volutes for light weight and portability.
- Easy maintenance.
- High Grade carbon/ceramic mechanical seal.

Performance Curve

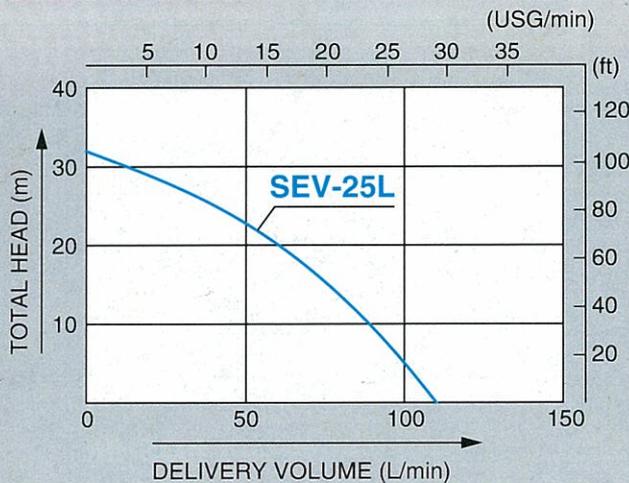

Note: Performance ratings are guaranteed minimum, not inflated maximum.



GUARANTEED
Engine & Pump spare parts service!
Specification & Quality!
Sales support!

Specifications

MODEL		SEV-25L
PUMP	Connection Dia	25 mm (1")
	Connection Thread	Outer Pipe Thread
	Total Head	32 m (105 ft)
	Delivery Volume	110 L/min (29 USG/min)
	Max. Suction Head	8 m (26 ft)
ENGINE	Model	Forced Air Cooling 2 Stroke Gasoline Engine KC 26
	Exhaust Volume	26 cc
	Output	0.70 kW (0.93 PS) / 7500 rpm
	Fuel	2 Stroke Mixed Gas and Oil (50:1)
	Fuel Tank Capacity	0.6 L
Starting Method		Recoil Starter
Standard Accessories		1 Strainer, 2 Hose Couplings(φ 25), 3 Hose Bands (φ 32)
Net Weight		5.5 kg (12.1lbs)

*For the purpose of improvement, specifications are subject to changes without notice.



www.koshinpump.com

KOSHIN LTD.
KYOTO, JAPAN

KOSHIN AMERICA CORP. / EUROPE OFFICE

11-11 699703901